


REAL TIME. ON-LINE. WIRELESS.

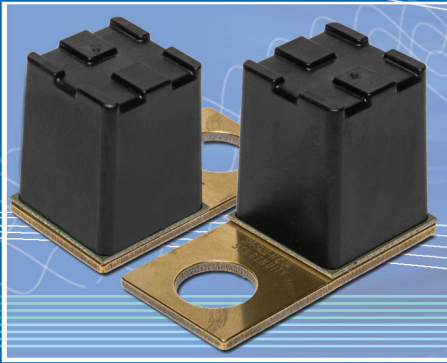

Key Features

- Temperature Range: -20°C ... +120°C
- Center Frequency: 428.844 to 438.797 MHz
- Temperature Coefficient of Frequency: 10.116ppm/K

Typical Applications

- Switchgear where **Bolt** mounting is desired
- Applications where access is limited or restricted
- Applications where providing power to sensors is difficult

Measurement Conditions


- Ambient Temperature: 25°C
- Wireless Reader Tx Level: -6 dBm
- Wireless Reader Tx Antenna Gain: 0 dBi
- Wireless Reader Rx Threshold¹: 0 dB

Performance Specifications²

Parameter	Typical Value	Tolerance/Limit/Condition
Minimum Signal Strength (Reader Rx magnitude readout)	22 dB	min. 15 dB
Center frequency [f _c] (Reader frequency readout) Sensor Module list:	428.844 MHz 429.749 MHz 430.654 MHz 431.559 MHz 432.463 MHz 433.368 MHz 434.273 MHz 435.178 MHz 436.082 MHz 436.987 MHz 437.892 MHz 438.797 MHz	± 75 kHz
Time Domain Slope ³	1.3 dB/μs	-
Operating Temperature Range [OTR]	-	-20°C to 120°C
Storage Temperature Range	-	-40°C to 120°C
Temperature Coefficient of Frequency [TC _{f1}] ⁴	10.116 ppm/K	at 50°C
Temperature Coefficient of Frequency [TC _{f2}] ⁴	-0.0207ppm/K ²	at 50°C
Temperature Error due to Aging ⁵ within OTR	0.5 K	max. -3K to3K



- Notes:**
1. In reference to internal reader signal level.
 2. Under conditions specified in the Measurement Environment (see following pages). Specifications for the sensor have been established by using the SenGenuity WSR-T2 Wireless SAW Reader. See reader specification sheet for information on standard set up of reader hardware
 3. Decay of time domain response envelope, measured with 4MHz span around center (resonant) frequency
 4. $\Delta f[\text{Hz}] = (TC_{f1}[\text{ppm/K}] \times T[^\circ\text{C}] + TC_{f2}[\text{ppm/K}^2] \times T[^\circ\text{C}]^2) \times f_c[\text{MHz}]$
 5. For 1000h continuous operation at maximum operating temperature.

Typical Temperature Error (maximum operating temperature)



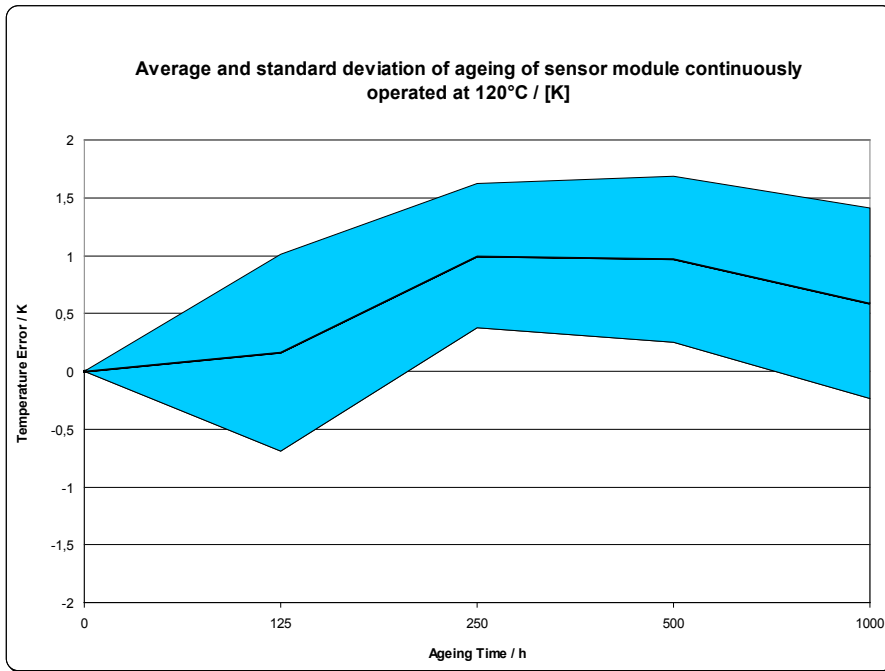


Sensor Characteristics (Temperature Characteristics and Time Domain Response)


Example: SM-S429A-12H

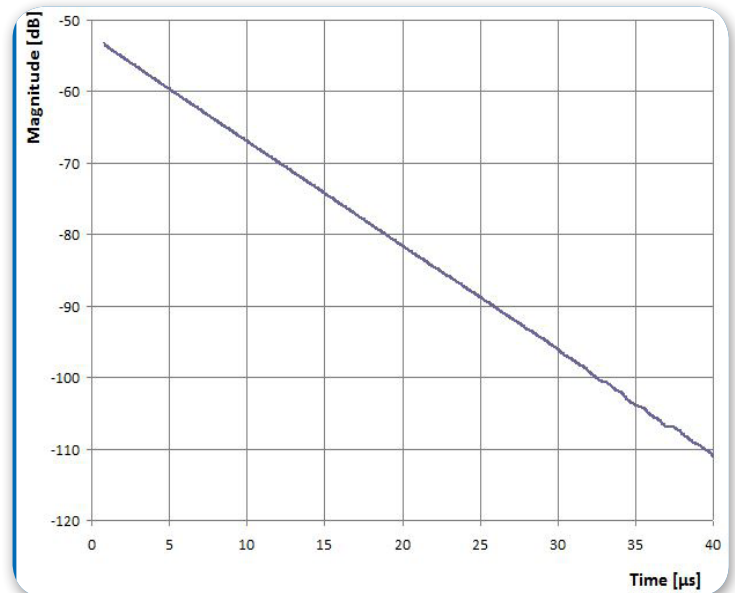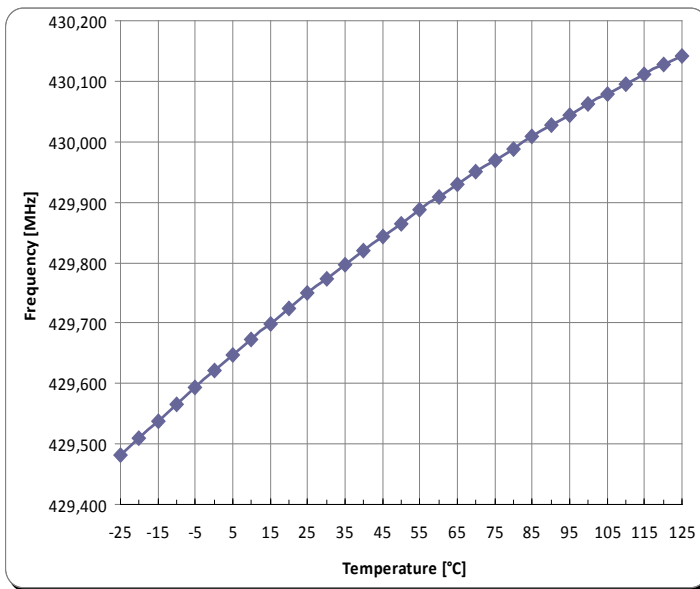

Dimensions in mm

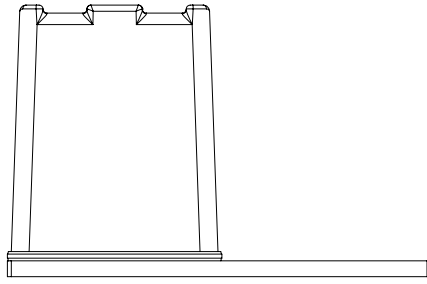


Datecode: Year + Week
 H 2016
 J 2017
 K 2018

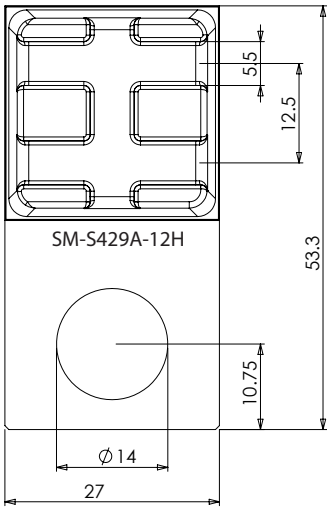

	Item#	Description & Ordering code	Marking
1	713200346	Sensormodul-SM-S428-12H-Standard (Bolt Mount with hole 2)	SM-S428-12H
2	713200347	Sensormodul-SM-S429A-12H-Standard (Bolt Mount with hole 2)	SM-S429A-12H
3	713200348	Sensormodul-SM-S430A-12H-Standard (Bolt Mount with hole 2)	SM-S430A-12H
4	713200349	Sensormodul-SM-S431A-12H-Standard (Bolt Mount with hole 2)	SM-S431A-12H
5	713200350	Sensormodul-SM-S432A-12H-Standard (Bolt Mount with hole 2)	SM-S432A-12H
6	713200351	Sensormodul-SM-S433R-12H-Standard (Bolt Mount with hole 2)	SM-S433R-12H
7	713200352	Sensormodul-SM-S434D-12H-Standard (Bolt Mount with hole 2)	SM-S434D-12H
8	713200353	Sensormodul-SM-S435A-12H-Standard (Bolt Mount with hole 2)	SM-S435A-12H
9	713200354	Sensormodul-SM-S436A-12H-Standard (Bolt Mount with hole 2)	SM-S436A-12H
10	713200355	Sensormodul-SM-S437-12H-Standard (Bolt Mount with hole 2)	SM-S437-12H
11	713200356	Sensormodul-SM-S438A-12H-Standard (Bolt Mount with hole 2)	SM-S438A-12H
12	713200357	Sensormodul-SM-S438B-12H-Standard (Bolt Mount with hole 2)	SM-S438B-12H
	723200160	KIT TT-12SMBMH2 (Set of all 12 sensors)	Not applicable

Circuit Diagram

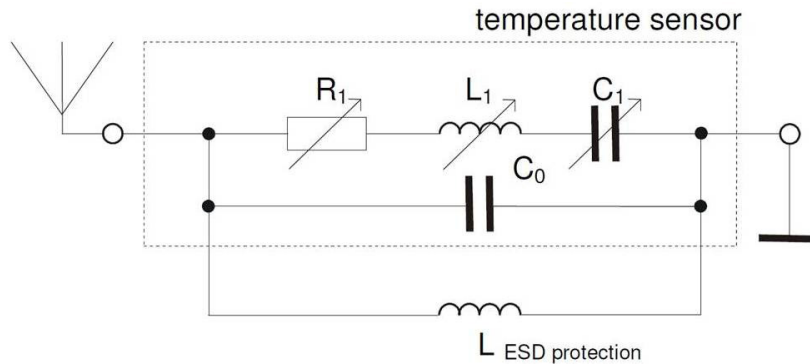

Stability Characteristics and Reliability

After the following tests the sensor shall meet the whole specification:

- Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
- Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
- Change of temperature: -55 °C to 125°C / 15 min. each / 100 cycles;
DIN IEC 68 part 2 – 14 Test N
- ESD: MIL-STD-883E using coupling network of ISO 10605 and EN 6100-4-2;
HBM:250V
- Impact Strength: 1J , rod pendulum, impact at upper edge of sensor module cap
(may occur only once in sensor module lifetime)

This sensor is RoHS compliant (2011/65/EU)

Measurement Environment

Specified electrical properties shall be measured under the following test conditions

1. Ambient temperature: 25°C
2. Humidity: 30% - 60%
3. Distance sensor antenna to reader antenna: 80cm (signal path shall have minimum free 1st Fresnel zone)
4. Anechoic environment: Reflected RF signals (multipath echos) should be attenuated minimum 25 dB in reference to direct signal between reader / sensor module
5. Inband interferer: Outside signals in the measured frequency range shall be attenuated by 40 dB in reference to reader Tx signal power
6. Sensor mounting: Sensor module has to be mounted on a ground plane perpendicular to sensor module antenna rotation axis
7. Antenna alignment: Rotation axis of sensor module and reader antenna have to be parallel and perpendicular to transmission path

The frequency and signal level is influenced by reactive interaction to materials within the reactive near field, approximately 17.5 cm. For a description of an example implementation of these requirements see application note [Sensor Module Test Setup](#).

Product status and specifications are subject to change.

DISCLAIMER

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application.
No rights under any patent accompany the sale of any such product(s) or information.

REV. 11.08.2016