

REAL TIME. ON-LINE. IN-LINE.



Description

The ViSmart® VS-2511 and VS-2610 viscosity sensors measure the viscosity of a wide range of fluids including printing inks and a variety of industrial lubricants. The sensors make use of state of the art Acoustic Wave Technology to provide real-time, continuous monitoring of viscosity.

Key Features

- Continuous real-time, in-process relative viscosity measurement
- Unaffected by shock or vibration
- Industrial grade reliability
- Hazardous location approval for VS-2511 in conjunction with VB-2510

Applications

- Printing:
 - Water Based Inks
 - Solvent Based Inks
- Industrial lubricants

Performance Specifications

Parameter	VS-2511	VS-2610
Physical		
Viscosity Range (AV) ¹ (cSt) ²	1 to 400 (0.4 to 140) ³	1 to 400 (0.4 to 140) ³
Viscosity Repeatability % of Reading	± 10%	± 10%
Sensor Head Pressure Rating [Gauge Pressure] PSIG (bar)	60 (4.14 bar)	60 (4.14 bar)
Burst Pressure Rating [Gauge Pressure] PSIG (bar)	90 (6.00 bar)	90 (6.00 bar)
Measurement rate (Reading/second)	1 / second	1 / second
Interface	Proprietary SPI	Proprietary SPI
Electrical Data		
Power Supply Voltage (Vdc)	5 to 10	5 to 10
Power Supply Current (mA)	<35	<35
Power Consumption (mW)	<175 @ 5V	<175 @ 5V
Approvals		
EMC Immunity/Emission	EN 55000, EN 61000-4-2, EN 61000-4-3, EN 61000-4-6	
Environmental		
Fluid Operating Temperature (°C)	0 to 60	-15 to 105
Ambient Operating Temperature (°C)	0 to 60	-15 to 105
Storage Temperature (°C)	-40 to 80	-40 to 80

Parameter	VS-2511	VS-2610
Mechanical		
ViSmart® Sensor (inches)	Φ1.00 x L 4.23	Φ1.00 x L 4.23
ViSmart® Sensor (mm)	Φ25.40 x L 107.42	Φ25.40 x L 107.42
Sensor Connector (inches)	M12 x 1 Circular Connector	M12 x 1 Circular Connector High Temperature
Sensor Connector (mm)		
Weight (approximate) (oz) (g)	5 (153 g)	5 (153 g)
Ingress Protection Rating of ViSmart® Sensor	IP67 ¹	IP67 ¹
Ingress Protection Rating of Sensor Connector	n/a	n/a
Connector Type	M12x1, 8 pin male	M12x1, 8 pin male
Recommended max Torque for NPT thread engagement (N-m)	40	40
Vibration ²	+/-20g (5-2000 Hz)	+/-20g (5-2000 Hz)
Shock ⁶	100g (6ms)	100g (6ms)

Notes:



- All viscosity measurements are shear rate and material dependent. Variations in material properties and homogeneity could result in varied interpretations of acoustic viscosity by the sensor.
- The general relationship between acoustic viscosity and kinematic viscosity is: Acoustic viscosity (AV) = kinematic viscosity x density² (cSt x (g/cm³)²).
- cSt value based on use of calibration fluid with typical density value of 1.7 g/cm³. Actual cSt range greater for lower density fluids. Correlation functions between acoustic viscosity and dynamic/kinematic viscosity should be constructed in consultation with SenGenuity. Attempts at using the above mentioned formulae in isolation will most likely result in poor results.
- When mated with IP67/IP68 rated connector and cordset
- Per Mil-Std-810C, Figure 514.2-2
- Per Mil-Std-202G, Method 213B

Wetted Material:

- When completely immersed, the following materials are exposed to fluid media:
- AISI 304 Stainless Steel
 - Loctite FP 4470
 - Diamond like carbon
 - Nickel Plated Kovar


Physical Dimensions

Dimensions in inches (mm)

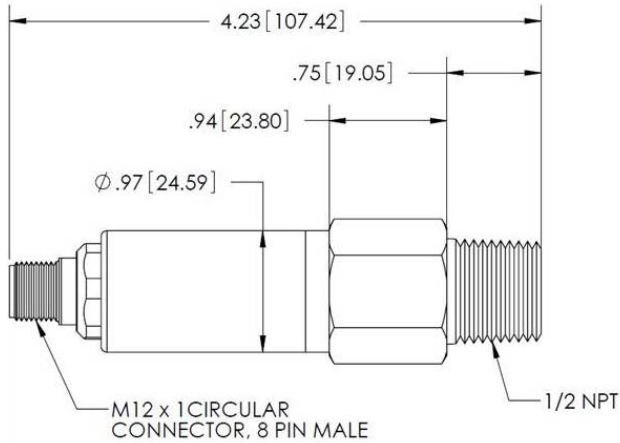

M12x1 Connector Pinout

Pin #	Name	Description
1	A1	Chip Select Decode 1
2	A0	Chip Select Decode 0
3	MISO	Master In/Slave Out
4	SCK	Serial Clock
5	GND	Supply Voltage Return
6	NC	No Connect
7	MOSI	Master Out/Slave in
8	V+	Supply Voltage Input



Product status and specifications are subject to change.

Additional Information

VS-2511 Hazardous Certification Information					
Parameter	Value				
Electrical Data					
Intrinsic Safety Parameters	Ui	Ii	Li	Pi	Ci
	8.6V	200mA	negligible	361mW	1uF
Conformity, Approvals, and Installations					
Examination Certificate Number	TÜV 12 ATEX 091790 X		Intertek ETL 4009279		
Group, Category, Type of Protections, Temperature Classification	II 2 G Ex ib IIB T4 Gb		Class I, Division 1, Groups CD, T4; Class I, Zone 1, Group IIB, T4 Intrinsically Safe, Securite Intrinsic		
QAN Certificate Number	ITS12ATEXQ7518; ITS12ATEXQ7712		N/A		
Directive Conformity	EN 60079-0, EN 60079-11		ANSI/UL Std 913; CAN/CSA C22.2 No. 157		




Note: The VS-2511 Hazardous Certification is only valid in conjunction with a VB-2510 Shunt-Diode Barrier.

Ordering Information

Part No.	Model	Description
712200039	VS-2511	VS-2511 ViSmart Viscosity Sensor with 1/2 NPT Thread/M12 Connector, ETL/ATEX Certified
712200038	VS-2610	VS-2610 ViSmart Viscosity Sensor with 1/2" NPT Thread/M12 Connector/High Temp
	VS-2xxx-XXX**	ViSmart Viscosity Sensor with OEM code

**Please contact Vectron International for OEM applications

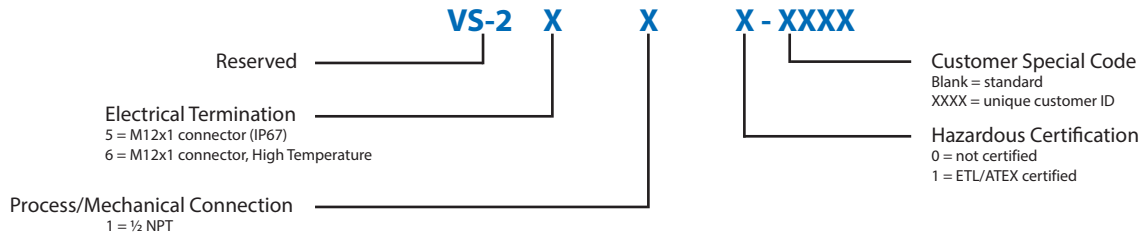

Please contact SenGenuity at sensors@sengenuity.com for further details, comments or questions regarding this or any other product.

DISCLAIMER

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application.

No rights under any patent accompany the sale of any such product(s) or information.